





Please read instructions before commencing installation and retain for future reference.



### Connecting the Terminal Block

Connect main supply (brown - live, blue - neutral) into terminal block making sure all connections are tight.

4

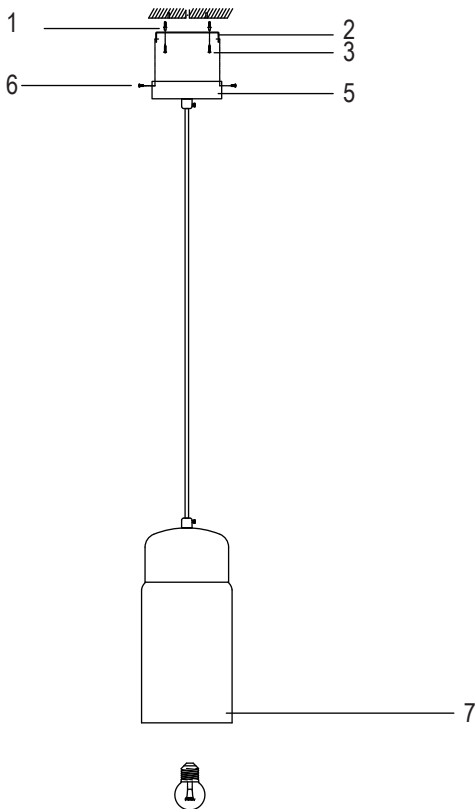

### SPECIFICATIONS:

- **Fitting:** Glass
- **Lamp type:** E27 40W MAX. Bulb Exclude.
- **Protection against electric shock:** CLASS I.
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.
- **Quality/Corrosive rating:** QC21: Burning period: 12hrs/24hr cycle. Commercial use, indoor mainly - painted or plated metals. Not for use in corrosive environments.

### INSTALLATION INSTRUCTIONS:

**⚠** Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

1. Ensure mains supply is switched off.
2. Insert masonry plugs (1) into mounting surface.
3. Fit mounting bracket (2) onto mounting surface with self-tapping screws (3).
4. Connect main supply wires to terminal block (4) making sure all connections are tight.
5. Move ceiling plate (5) onto mounting bracket with nuts (6).
6. Fit lamp (7) firmly into lampholders.
7. Reconnect power.

### WARNING:

- Not for outdoor use or in wet conditions.

