




Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

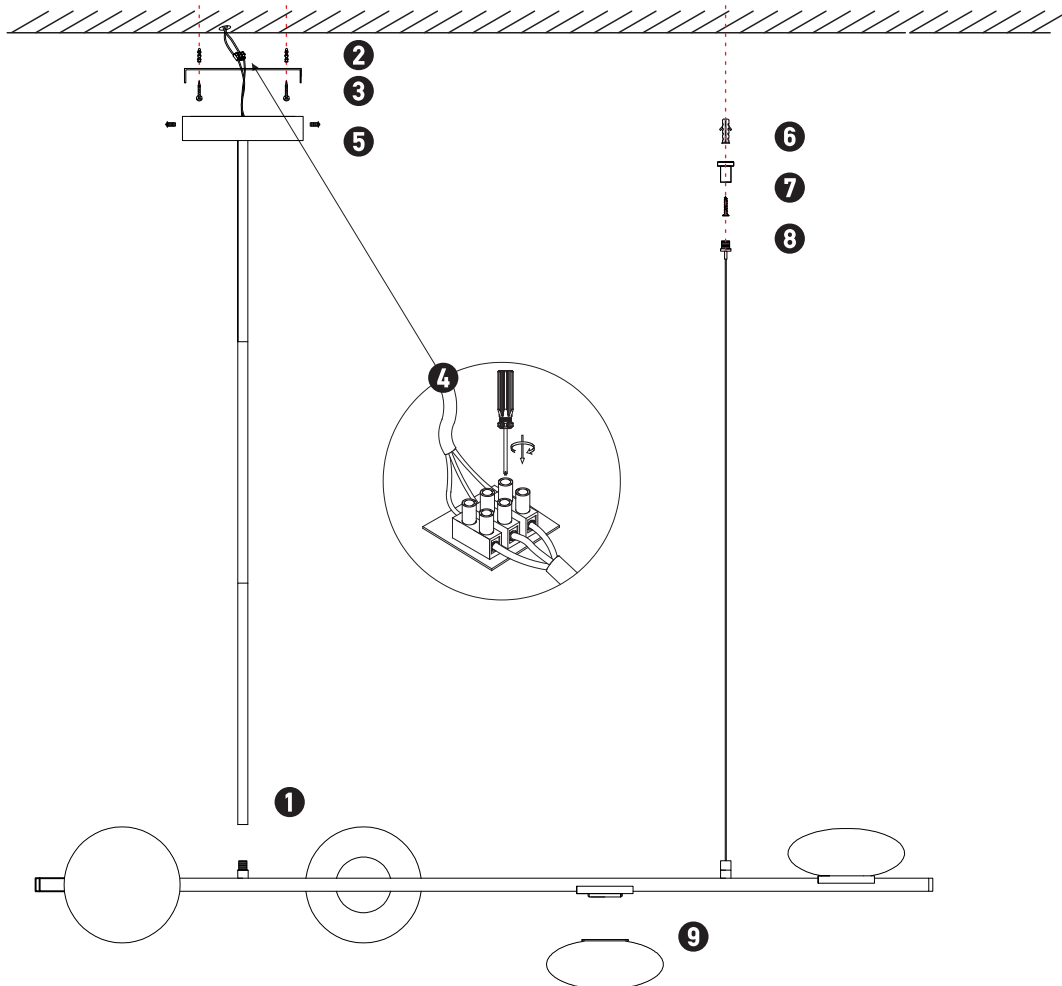

PENDANT LIGHT

22062

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Opal Glass
- **Lamp Type:** LED , 23W , 3000K , 2300Lm , CRI90
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

- Ensure main supply is switched off.
- Screw the vertical arm of the light to the horizontal arm (1).
- Insert masonry plugs into mounting surface (2).
- Fit mounting bracket onto mounting surface with self-tapping screws (3).
- Connect main supply wires to terminal block (4) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (5).
- Insert hanging wires masonry plugs into mounting surface (6).
- Fit mounting bracket onto mounting surface with self-tapping screws for hanging wires (7).
- Adjust the height with the hanging wires (8).
- Screw clockwise all the glasses (9).
- Reconnect power.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.



LED

CRI 90

IP 20

0.5m

