
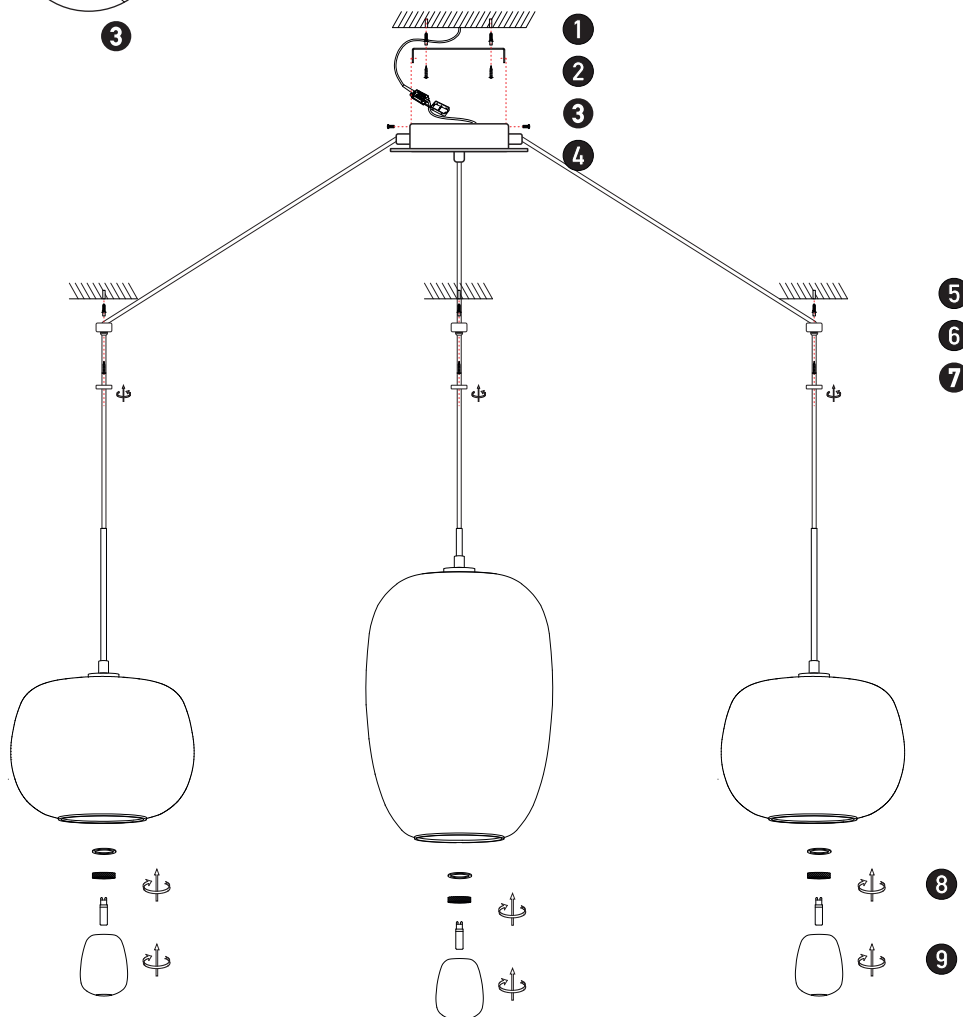


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

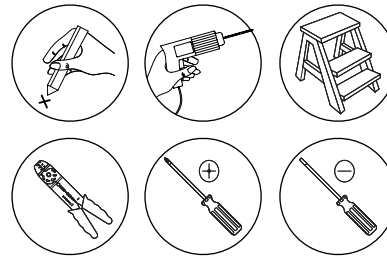

PENDANT LIGHT

22148

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Smoked Glass Outside + Opal Glass Inside
- **Lamp type:** 3x G9 Led , MAX 7W / Bulb
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Insert masonry plugs (1) into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (2).
- Connect main supply wires to terminal block (3) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (4).
- The light is adjustable, place the cables in the position that works for you.
- Insert masonry plugs (5) into mounting surface, repeat three times.
- Fit mounting bracket onto mounting surface with self-tapping screws (6), repeat three times.
- Pass the cable through the hanging accessories and secure by screwing the safety caps (7), repeat three times.
- Use the rings to secure all glass shades on the lamp-holders (8).
- Install all G9 LED lamps into the lamp-holders, finally add the opal glasses (9).
- Reconnect power.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.
- Do not exceed the maximum wattage rating of the lamp.

