


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

3

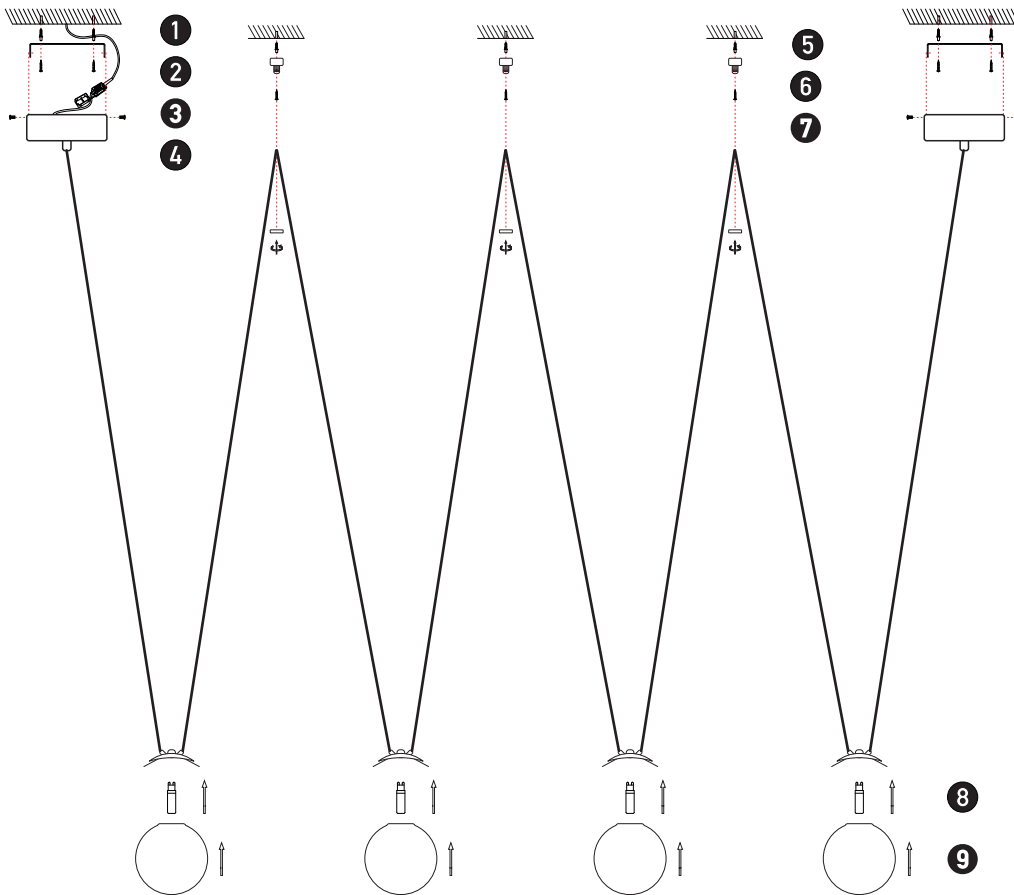

PENDANT LIGHT

22202

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Opal Glass
- **Lamp type:** 4x G9 Led , MAX 9W
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Insert masonry plugs (1) into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (2).
- Connect main supply wires to terminal block (3) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (4).
- The light is adjustable, place the cables in the position that works for you.
- Insert masonry plugs (5) into mounting surface, repeat three times.
- Fit mounting bracket onto mounting surface with self-tapping screws (6), repeat three times.
- Pass the cable through the hanging accessories and secure by screwing the safety caps (7), repeat three times.
- For second base, repeat steps 1, 2 and 4.
- Fit G9 lamps firmly into lamp holders (8), repeat four times.
- Secure opal glasses firmly with the springs (9), repeat four times.
- Reconnect power.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.

