




### Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

3

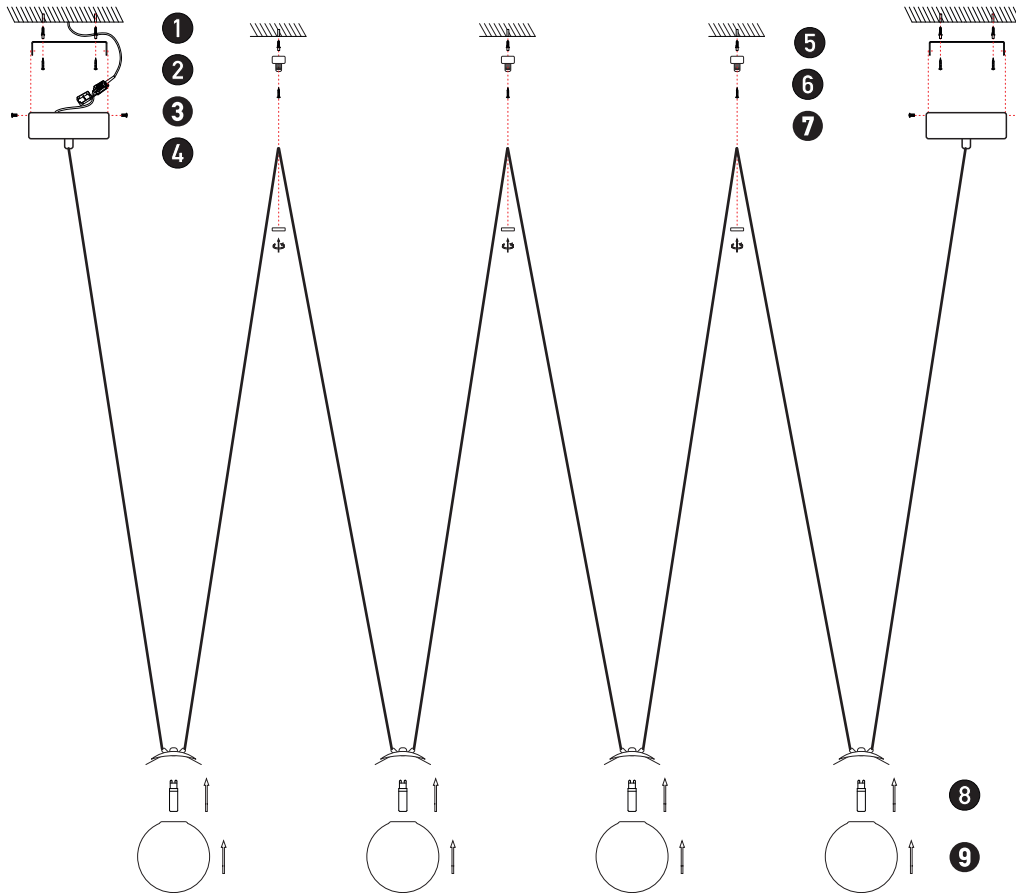

## PENDANT LIGHT

22202-W

Please read instructions before commencing installation and retain for future reference.

### SPECIFICATIONS

- **Material:** Metal + Opal Glass
- **Lamp type:** 4x G9 Led , MAX 9W
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

### INSTALLATION INSTRUCTIONS

**!** Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Insert masonry plugs (1) into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (2).
- Connect main supply wires to terminal block (3) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (4).
- The light is adjustable, place the cables in the position that works for you.
- Insert masonry plugs (5) into mounting surface, repeat three times.
- Fit mounting bracket onto mounting surface with self-tapping screws (6), repeat three times.
- Pass the cable through the hanging accessories and secure by screwing the safety caps (7), repeat three times.
- For second base, repeat steps 1, 2 and 4.
- Fit G9 lamps firmly into lamp holders (8), repeat four times.
- Secure opal glasses firmly with the springs (9), repeat four times.
- Reconnect power.

### WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.

